


TINKER & RASOR

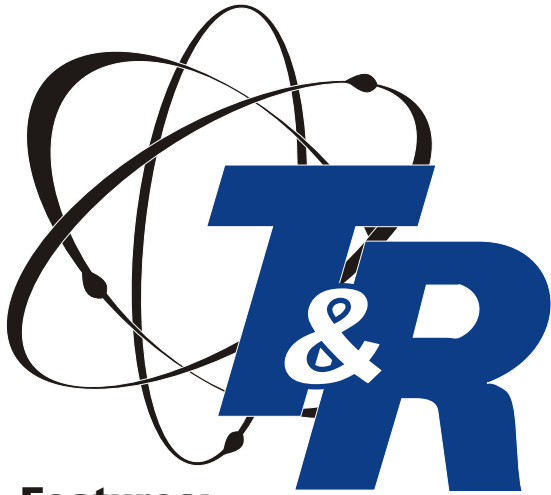

MODEL CI-50 **50 AMPS** **Current Interrupter**

Features:

- Interrupt AC or DC
- ON / OFF 0.1sec to 99.9sec
- Cable with locking connector
- LEDs show OPEN / CLOSED
- View Program shows cycle settings
- Battery operated (AA batteries)
- Easy to operate / program
- Cable storage in case
- Tan colored lockable case blends in to surroundings.



AVAILABLE FROM STOCK!

Distributed by



www.teststations.com

www.tinker-rasor.com

www.detectron.com

Info@tinker-rasor.com



Tinker & Rasor quality is found in our products,
our people and our customer service.



TINKER & RASOR

CORROSION MITIGATION INSTRUMENTATION



PRODUCT DATA SHEET

MODEL CI-50 CURRENT INTERRUPTER

Features:

Interrupt AC or DC side of the rectifier
No polarity concerns
0.1s - 99.9s programming (0.1sec increments)
Highly Accurate Internal Clock
LEDs show OPEN and CLOSED condition during operation
Battery operated (AA)
Battery life up to 100 hours
Low battery indication

Construction:

Hard plastic resin case with strong lid latches
Lock case with lid locked or able to open
Low profile tan color
Case includes internal storage area
Easy to read, high contrast panel

Applications:

- Interruption of CP rectifiers
- DCVG
- Pipe to Soil Potential
- Instant OFF
- Other potential readings

Specifications:

50 Amp max, AC or DC
120 Volt max, AC or DC
(4) "AA" Batteries
Starts in Open condition
-19°C to 60°C (-2°F to 140°F)

Dimensions:

5.75" x 12.25" x 10", 5 lbs
(146mm x 311mm x 254mm, 2.27 kg)

Shipping Dimensions:

14" x 12" x 6", 6 lbs
(355.6mm x 304.8mm x 15.24mm, 2.72 kg)

DELIVERY: **Immediately from STOCK**
EX-Works San Bernardino, CA USA
SERVICE: **24-hour Turn-Around**
TERMS: Net 30 Days, on approval of credit
WARRANTY: **90 Days**, parts and labor



Easy to use and operate, the CI-50 can be programmed in seconds and interrupting immediately.



The small panel size of the CI-50 allows for a large amount of storage room inside the case. The case can also be locked.



The CI-50 uses AA batteries. Easy to find and easy to replace. The AA batteries in the CI-50 will keep it operating for more than 80 hours.



The CI-50 Interrupter comes with the cable included. The single, locking connector leads to a pair of booted clamps. Cable length is 6' (1.8m) (p/n: 026-085)

AVAILABLE FROM STOCK