


TINKER & RASOR

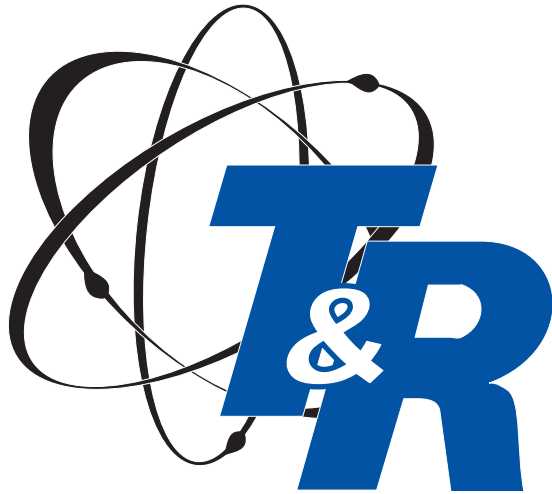

MODEL CS-10 10 AMP PORTABLE CURRENT SUPPLY

For Cathodic Protection Testing

- 0 - 10 Amps Adjustable Output
- LCD Display for Current Adjustment
- 1 milliamp resolution
- Continuous or Interrupted Operation
- Internal 12v Rechargeable Battery
- Use with External 12v DC Power
- Weather resistant, lockable case



AVAILABLE FROM STOCK!

Distributed by

The CS-10 portable current supply is an ideal DC current source for many cathodic protection corrosion maintenance tests. Commonly used for determining current requirements for cathodic protection and impressing current on an underground structure for assisting in locating electrical contacts with foreign systems such as underground utilities.

www.teststations.com

www.tinker-rasor.com

www.detectron.com

Info@tinker-rasor.com



Tinker & Rasor quality is found in our products,
our people and our customer service.





TINKER & RASOR

CORROSION MITIGATION INSTRUMENTATION

PRODUCT DATA SHEET

MODEL CS-10 Portable Current Supply

Features:

- Adjustable DC Output from 0 to 10 Amps
- External Power input (12v DC)
- Continuous or interrupted output
- LCD display of output, 1mA resolution
- Portable
- Lightweight, only 10 lbs

Construction:

- Near indestructible case
- Weather sealed
- Lockable
- Built for rugged use

Applications:

- CP Current Requirements
- CP Maintenance Tests
- Locating shorts and contacts
- Casing shorts
- Insulator testing and locating

Environment:

0°C to 50°C (32°F to 122°F)

Specifications:


- Output Range: 1 Amp, 10 Amp
- Continuous Operation
- Interrupter Timing:
 - 1 sec OFF - 4 sec ON
 - 2 sec OFF - 8 sec ON
 - 6 sec OFF - 14 sec ON

Use Dimensions:

5.75" x 12.25" x 10", 10 lbs
(146mm x 311mm x 254mm, 4.5kg)

Shipping Dimensions:

14" x 12" x 6", 12 lbs
(355.6mm x 304.8mm x 15.24mm, 5.44kg)

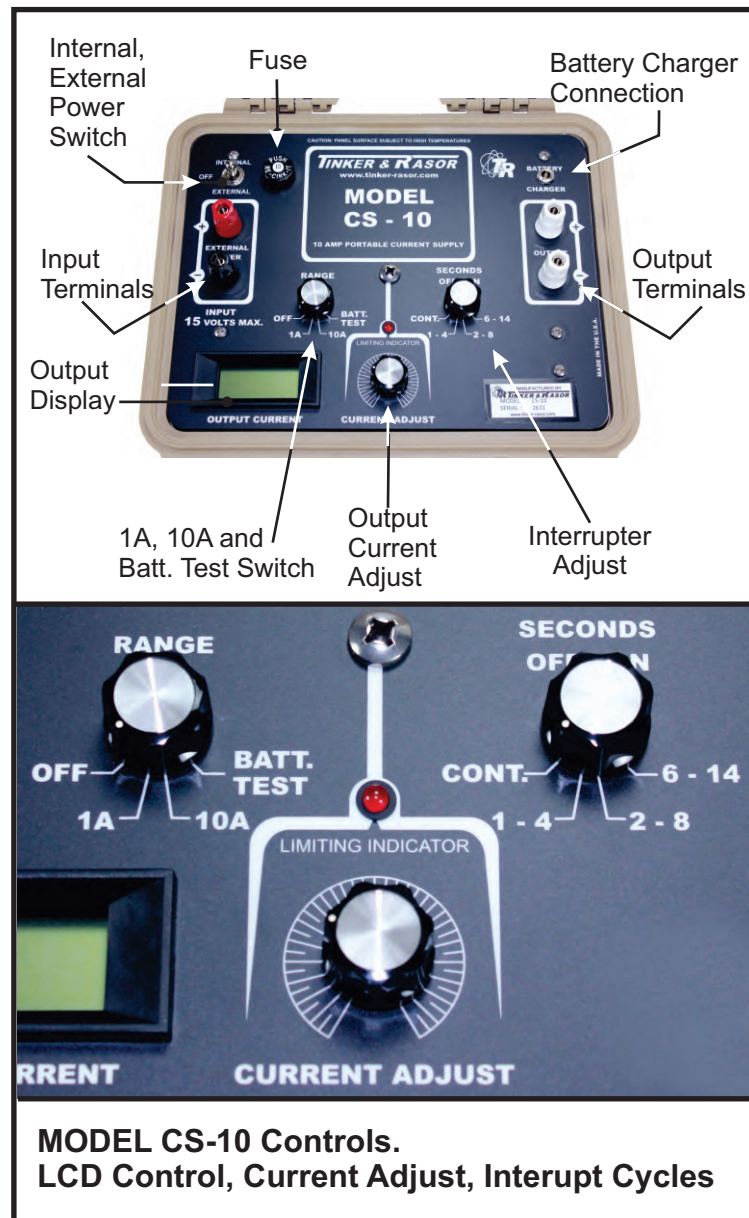

DELIVERY: **Immediately from STOCK**
F.O.B. San Bernardino, CA USA

SERVICE: **24-hour Turn-Around**

TERMS: Net30 Days, on approval of credit

WARRANTY: **90 Days**, parts and labor

AVAILABLE FROM STOCK